Important contact information

City contacts

City of Milpitas 455 E Calaveras Blvd. Milpitas, CA 95035 (408) 586-3000; TDD (408) 586-2643 www.ci.milpitas.ca.gov

Hours of operation 8 a.m. to 5 p.m., M–F

Water Emergencies (408) 586-2600, Business Hours (408) 586-2400, After Hours

Billing Questions (408) 586-3100

Water Conservation Hotline (408) 586-2666

Valley Water Pollution Hotline (888) 510-5151 (24 Hours)

Resources

Division of Drinking Water waterboards.ca.gov/drinking_ water/; (510) 620-3474

US EPA water.epa.gov (800) 426-4791

Department of Water Resources www.water.ca.gov

Bay Area Water Supply and Conservation Agency bawsca.org

American Water Works Association awwa.org or DrinkTap.org

Valley Water SFPUC valleywater.org sfwater.org

More information

For more information about this report or the City's water quality monitoring program, please contact:

City of Milpitas Public Works Department at (408) 586-2600; Milpitas CCR@ci.milpitas.ca.gov

How to get involved

City Council meetings are typically held on the first and third Tuesday of every month at 7:00 pm in the City Hall Council Chambers located at 455 E. Calaveras Blvd. Prior to each meeting, Council meeting agendas can be found posted at City Hall and can also be downloaded from the City website: www.ci.milpitas.ca.gov. Council meetings will not take place in the month of July but will resume in the month of August.



COVID-19 and Drinking Water

The World Health Organization has stated that the "presence of COVID-19 virus has not been detected in drinking-water supplies and based on our current evidence, the risk to water supplies is low". The City of Milpitas continues to monitor the COVID-19 emergency to ensure we continue providing safe, clean water for our community.

Frequently asked questions

Why is my water brown or not clear?

Stagnant water sitting in aging plumbing may become brown. This should clear up once sitting water is flushed out from the pipes and replaced with fresh water. Brown water could also be from blocked or clogged sink fixture aerators. Aerators are located at the end of a fixture and can be removed and flushed to clear any debris. Once flushed, hand-tighten to reassemble.

Why has my water pressure dropped suddenly?

Depending on your location, you could receive water pressure between 40 to 140 psi. Water pressure could have dropped for a variety of reasons. If your water pressure drops unexpectedly, please call Milpitas Public Works Department at (408) 586-2600. You can also check for clogged strainers and proper operation of any pressure regulators.

Is there fluoride in the water?

The City receives fluoridated water from Valley Water and SFPUC. SFPUC has been fluoridating water since 1995 while Valley Water began fluoridation in December of 2016.

How can I prepare for an emergency?

In a disaster or emergency situation, water supplies may be cut off or contaminated. Store enough water to supply everyone in your family for at least 3-5 days. For general drinking purposes, store one gallon of water per person per day and three gallons of water per person per day for limited cooking and personal hygiene use. If you store tap water, use food grade plastic containers. Replace water at least once every six months. If you buy bottled "spring" or "drinking" water, keep it in its original container. Label bottles with their replacement date and store in a cool, dark place.

What is "Making Water Conservation A Milpitas Way of Life"?

The State directs cities to Make Water Conservation a California Way of Life and prohibits wasteful practices. As we continue to experience dry conditions this year, the City would like to encourage residents to conserve water. The State's water restrictions along with additional water conservation measures set by the City include:

- Apply only as much water as your landscape needs to prevent water runoff onto streets and sidewalks.
- Wash vehicles with a hose that has a shut-off nozzle.
- Use a broom to clean driveways and sidewalks.
- Recirculate potable water in fountains or decorative water features.
- Do not water landscapes during or within 48 hours of measureable rainfall.
- · Restaurants to only serve drinking water upon request.
- Guests of hotels and motels can choose not to have towels and linens laundered daily.
- Pools and spas must be covered when not in use to prevent evaporation.


Visit www.savewatermilpitas.org for water conservation tips and water use schedules.

How can I treat my drinking water after a disaster?

If you run out of stored drinking water, strain and treat water from your water heater or toilet reservoir tank (except if you use toilet tank cleaners.) You cannot drink swimming pool or spa water, but it can be used for flushing toilets or washing.

Strain large particles by pouring water through a couple of layers of paper towels or clean cloth. Purify the water by:

- Boiling. Bring to a rolling boil and maintain for 3-5 minutes. To improve the taste, pour it back and forth between two clean containers to add oxygen back into the water.
- Disinfecting. If the water is clear, add 8 drops of bleach per gallon of water.
 If it is cloudy, add 16 drops. Shake or stir, then let stand for 30 minutes. A slight chlorine taste and smell is to be expected.

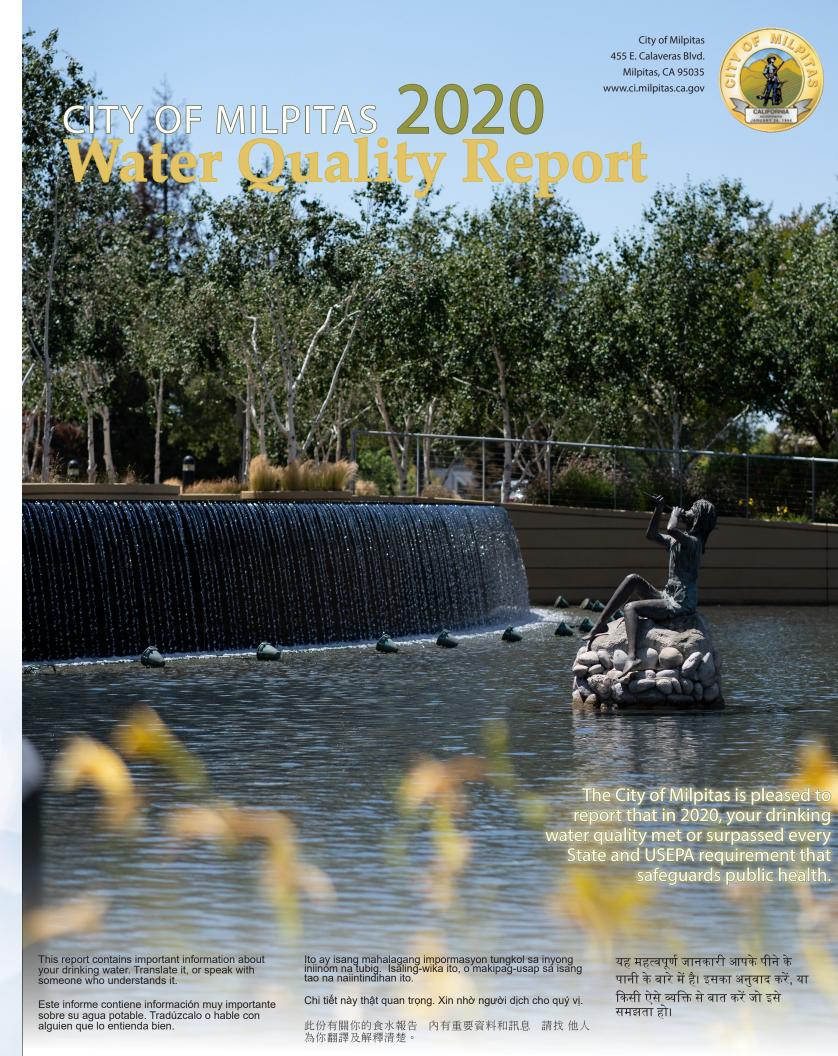

Our drinking water and how we protect it



The City of Milpitas draws water from two sources that provide clean water to residents and businesses. The water is purchased from two separate wholesalers: treated surface water from the San Francisco Public Utilities Commission (SFPUC) and treated surface water from the Valley Water (VW). In the event that water supply is interrupted from either VW or SFPUC, the City has the option of utilizing its emergency supply to meet basic water needs for a short duration of time. In 2020, the City supplied an average of 7.5 million gallons of water per day to approximately 16,800 homes and businesses for indoor and outdoor use.

SFPUC Supply

SFPUC water is a combination of Hetch Hetchy water and treated local water. Most of SFPUC's water is sourced from the Hetch Hetchy watershed located in the Sierra Nevada Mountains. This water is exempt from filtration requirements by the United States Environmental Protection Agency (USEPA) and State Water Resources Control Boards' Division of Drinking Water (DDW) due to the protected Sierra spring snow melt water source. Local water is collected within the Alameda watershed at Calaveras Reservoir and San Antonio Reservoir. Local water is treated through filtration and disinfection at the Sunol Valley Water Treatment Plant.

Valley Water Supply

Valley Water water is sourced primarily from the Sacramento-San Joaquin Delta watershed via the South Bay Aqueduct, Dyer Reservoir, Lake Del Valle, and San Luis Reservoir. The water supply is supplemented by local water sources at Anderson and Calero Reservoirs. Valley Water water is treated through filtration and disinfection at Penitencia and Santa Teresa Water Treatment Plants.

Recycled Water – providing drought-proof, high quality water for our community

In 2020, irrigation and industrial customers in Milpitas used 350 million gallons of recycled water, thereby conserving an equal amount of potable drinking water. Recycled water from the San Jose/Santa Clara Water Pollution Control Plant undergoes an extensive treatment process (including filtration and disinfection) and is delivered to landscape irrigation and industrial customers in Milpitas, San Jose, and Santa Clara. For more information pertaining to recycled water, visit www.sanjoseca.gov/sbwr.

Emergency Supplies

The City does not blend or combine Valley Water or SFPUC water under normal operating conditions. However, the service areas can be interconnected to provide emergency water supply if needed. The City's water system is also interconnected with the Alameda County Water District to the north and San Jose Water Company to the south. In the event that there is an emergency, either or both agencies can provide water to the City. Valley Water and SFPUC share an intertie that can supply water from one wholesaler to the other. The City can also provide temporary emergency water supply using Pinewood Well, located in the southwestern portion of the City.

Drinking Water Source Assessment Program

Drinking Water Source Assessment Programs evaluate the vulnerability of water sources to potential contamination. Both Valley Water and SFPUC have conducted drinking water source assessments for the City's potable water supplies. The assessments are available for review at the State Water Resources Control Board (SWRCB) – Division of Drinking Water District Office. You may request that a summary of the assessments be sent to you by calling (510) 620-3474.

SFPUC conducts an annual watershed sanitary survey for the Hetch Hetchy source as well as five year sanitary surveys for local water sources. These surveys evaluate the sanitary condition, water quality, potential contamination sources, and the results of watershed management activities. The surveys were completed with support from partner agencies, including the National Park Service and US Forest Service. These surveys have identified wildlife, stock, and human activities as potential contamination sources.

Valley Water water sources are vulnerable to potential contamination from a variety of land use practices, such as agricultural and urban runoff, recreational activities, livestock grazing, and residential and industrial development. The imported sources are also vulnerable to wastewater treatment plant discharges, seawater intrusion, and wild fires in open space areas. In addition, local sources are also vulnerable to potential contamination from commercial stables and historic mining practices. No contaminants associated with any of these activities have been detected in Valley Water's treated water. The water treatment plants provide multiple barriers for physical removal and disinfection of contaminants.

Contaminants and Regulations

In order to ensure that tap water is safe to drink, the United States Environmental Protection Agency (USEPA) and the State Water Resources Control Board (SWRCB) prescribe regulations that limit the amount of certain contaminants in water provided by public water systems. The State Board regulations also establish limits for contaminants in bottled water that provide the same protection for public health.

The sources of drinking water (both tap water and bottled water) include rivers, lakes, streams, ponds, reservoirs, springs and wells. As water travels over the surface of the land or through the ground, it dissolves naturally-occurring minerals and, in some cases, radioactive material, and can pick up substances resulting from the presence of animals or from human activity. Contaminants that may be present in source water include:

- Microbial Contaminants, such as viruses and bacteria, that may come from sewage treatment plants, septic systems, agricultural livestock operations, and wildlife.
- Inorganic Contaminants, such as salts and metals, that can be naturally-occurring or result from urban stormwater runoff, industrial or domestic wastewater discharges, oil and gas production, mining, or farming.
- Pesticides and Herbicides, that may come from a variety of sources, such as agriculture, urban stormwater runoff, and residential uses.
- Organic Chemical Contaminants, including synthetic and volatile organic chemicals, that are by-products of industrial processes and petroleum production, and can also come from gas stations, urban stormwater runoff, agricultural application, and septic systems.
- Radioactive Contaminants that can be naturally-occurring or be the result of oil and gas production and mining activities.



Maintaining water quality

The City is dedicated to maintaining the water quality and protecting the water supply. The safegaurds include a combination of preventative and monitoring practices described below.

Hydrant and Water Main Flushing. Flushing of fire hydrants and water mains is performed to remove sediment and keep the distribution system refreshed by circulating water in pipes that would otherwise remain stagnant. As a result, residents in the immediate vicinity may experience temporary discoloration in their water. This discoloration does not affect the safety of the water. If you experience discoloration in your water after City crews have been flushing in your neighborhood, clear the water from your house plumbing by running water faucets for a few minutes prior to use.

Backflow Testing. A backflow preventer is a plumbing device that keeps the water supply safe by preventing water on private property from flowing back into the City's distribution system. Backflow devices are required to be tested annually to ensure they are working properly

Water Sampling. Sampling of the water system is performed in accordance to State and Federal rules and regulations. This requires purging of the water line for a sample to be lab tested. See the third page of this CCR for water quality sampling results.

Littering is throwing it all away

Nearly 80 percent of the debris found in our watersheds, creeks, shorelines, and the South San Francisco Bay is washed, blown, or dumped by humans residing in the vicinity of the water shed. One piece of litter can end up miles from where it was improperly discarded, polluting our water systems and causing a threat to wildlife. The primary sources of litter are: pedestrians, motorists, trucks with uncovered loads, household trash handling and its placement at the curb, loading docks, and demolition sites.

Because we live in a watershed, our community's litter makes a very big impact. A watershed is a land area that drains water into a creek, river, lake, wetland, bay or groundwater aquifer. In the Santa Clara Valley, the water from rain and irrigation (called runoff) picks up litter and carries it directly into storm drains and creeks that flow to San Francisco Bay.

You Can Make a Difference

- Don't litter, ever. Something as small as a cigarette butt thrown on a city street has long term adverse effects on the environment.
- When you see litter, pick it up and dispose of it properly.
- · Secure and cover all truckloads of loose debris.
- Make sure your trash can lid is closed securely.
- Always bring a bag for trash when picnicking, hiking, or camping.
- If you own a business, check your dumpster on a regular basis, keep it locked and protect it from illegal dumping.
- Report illegal dumping to the Milpitas Police Department at (408) 586-2400. For solid waste and street sweeping services, call Milpitas Sanitation at (408) 988-4500.
- Call the Santa Clara Countywide Recycling Hotline at (800) 553-8414 or visit www.reducewaste.org to find out where to dispose of or donate large commercial items such as furniture, appliances, etc.


Water Quality Data

In 2020, The City of Milpitas collected over 2,000 drinking water samples to be analyzed by State-certified laboratories. The water supplied in Milpitas met all USEPA and State drinking water health standards in 2020, as shown in the adjacent table, which lists all drinking water constituents that were detected during the 2020 calendar year. A full list of tested constituents is available upon request. Unless otherwise noted, the data presented in this table reflects testing completed between January 1 and December 31, 2020.

Some data, although representative, were collected prior to 2020, as the State Board requires monitoring for some constituents less frequently. The concentrations of these constituents do not vary frequently or significantly.

Water Supply Map

The City serves SFPUC source water to the area south of Calaveras Blvd and east of I-680, as well as north of Calaveras Blvd and east of I-880. VW service areas are west of I-880, as well as south of Calaveras Blvd and west of I-680. Refer to the Water Supply Map below to see where your water

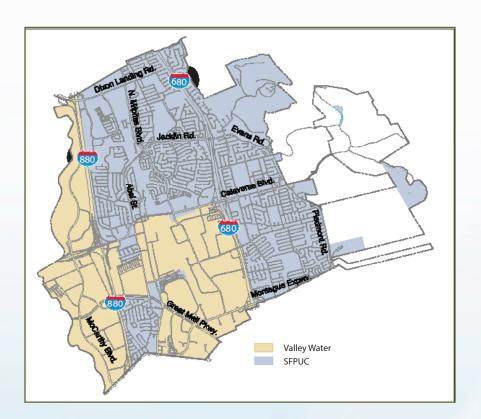

What else should I know?

Drinking water, including bottled water, may reasonably be expected to contain at least small amounts of some contaminants. The presence of contaminants does not necessarily indicate that water poses a health risk. More information about contaminants and potential health effects can be obtained by calling the USEPA Safe Drinking Water Hotline at (800) 426-4791.

Some people may be more vulnerable to contaminants in drinking water than the general population. Immuno-compromised persons, such as persons with cancer undergoing chemotherapy; persons who have undergone organ transplants; people with HIV/AIDS or other immune system disorders; some elderly; and infants can be particularly at risk from infections. These individuals should seek advice from their health care providers.

USEPA/Centers for Disease Control guidelines on appropriate means to lessen the risk of infection by cryptosporidium and other microbial contaminants are available from the USEPA Safe Drinking Water Hotline at (800) 426-4791.

Definitions of Key Terms

Maximum Contaminant Level (MCL). The highest level of a contaminant that is allowed in drinking water. Primary MCLs are set as close to the PHGs (or MCLGs) as is economically and technologically feasible. Secondary MCLs are set to protect the odor, taste and appearance of drinking water. MCLs are established by USEPA and the State Board.

Maximum Contaminant Level Goal (MCLG). The level of a contaminant in drinking water below which there is no known or expected risk to health. MCLGs are set by the USEPA.

Maximum Residual Disinfectant Level (MRDL), The highest level of a disinfectant allowed in drinking water. There is convincing evidence that addition of a disinfectant is necessary for control of microbial

Maximum Residual Disinfectant Level Goal (MRDLG). The level of a drinking water disinfectant below which there is no known or expected risk to health. MRDLGs do not reflect the benefits of the use of disinfectants to control microbial contaminants.

Notification Level (NL). Health based advisory levels established by SWRCB for chemicals in drinking water that lack MCLs.

Primary Drinking Water Standard (PDWS). MCLs and MRDLs for contaminants that affect health along with their monitoring and reporting requirements and water treatment requirements.

Treatment Technique (TT). A required process intended to reduce the level of a contaminant in

Public Health Goal (PHG). The level of a contaminant in drinking water below which there is no known or expected risk to health. PHGs are set by the California Office of Environmental Health Hazard Assessment.

Regulatory Action Level (AL). The concentration of a contaminant which, if exceeded, triggers treatment or other requirements that a water system must

Total Organic Carbon (TOC). TOC is precursor for disinfection byproduct formation.

Turbidity. Turbidity is a measure of the cloudiness of the water, and is also used to indicate the effectiveness of the filtration system. High turbidity can hinder the effectiveness of disinfectants.

UCMR. Unregulated Contaminant Monitoring Rule requires monitoring for contaminants not currently regulated. This monitoring provides a basis for future regulatory actions to protect public health.

Mathematical Content											
Mary					Distribution System Valley		Water		DLIC	Typical	
Mathematic	PARAIVIETER	Unit	(AL), or	(MCLG), or				D .			
Manument	SOURCE WATER SAMPLING	NITH		NIA			1	1000/		00.0 4000/	2
Benefic	INORGANIC CHEMICALS										
Part			•								
Manufact Manufact											
March Marc											
March Mar											
Section Sect		ррш	10	10			ND	ND - 0.6	ND	ND	3, 7, 0
Contail June Cont		nnn	TT	NIA	_		2.1	15 27	2.0	17 24	10
Series	-	ppm	11	NA	_		2.1	1.5 - 2.7	2.9	1./ - 3.4	10
Company Com		cvsts/L	TT	(0)	_		ND	ND - 0.1	0.01	0 – 0.05	1
March Marc	Inorganics	,									
Mathematical Control Contro	Asbestos	MFL	7	7			1.6	1.6	ND	ND	
Lead											
Seport				0.0				·			2.47.40
Description Responsible											
Desinfection descolate Colorine Colorin		ррш	(1.5)	0.5	Hi		2ΔΔ				3, 17, 10
Inch Inchance In		maa	[4]	[4]	1119		WW.		_		20
Marche Part Part	Total Trihalomethanes										
Production Pro											
Marie Mari	MICROBIOLOGICAL					Average			Range		
MALLIBIR One	Total Coliform Bacteria	% pos/month	5.0%	(0)		0.0%			0.0%		1
Aurinamian ppb 200 NA NA NO ND -51 ND ND 3,4	SECONDARY DRINKING WATER STANDARDS (AESTHETI										
Chloride							-	-			
Color											
Odor											
Specific Conductance											
Sufficiency								·			
Total Dissolved Solids		·									
Turbidity											
Unit											, .2
MARAMETER Unit NL	,						0.000	0 0.12	,,,,	113 012	
Chierate	UCMR 3 (2014-2015)										
Boron ppb 1000 NA NA ND ND − 123 ND ND −203 Molyddenum ppb NS 1.9 1.8-2.0 <1 ND − 11 NA NA Strontium ppb NS 1.51 14-290 ND ND ND 11 12-234 Vanadium ppb 50 ND ND-45 ND ND-4 NA NA VARAGETER Urit MRL Average Bange Fange HAAS ppb NA 3.01 14-47 14-47 HAAS ppb NA 3.44 0.38-15 14-47 HAAS ppb NA 3.329 22-47 14-47 14-47 14-47 14-47 14-47 14-47 14-47 14-47 14-47 14-47 14-47 14-47 14-47 14-40 14-47 14-47 14-47 14-47 14-47 14-47 14-47 14-47 14-47 14-47 14-4											
Molybdenum											
Strontium											
Vanadium	·										
Unit MRIL Average Bange Average Bange Average Bange Average Bange Average Bange Average Bange Ba											
PARAMETER		bbn		30	ND	ND-4.5	ND	ND - 4	INA	INA	
HAA5		Unit	Λ.	/RI		Average			Range		
HAA6Br							_				
HAA9											
Quinoline ppb 0.02 0.028 ND - 0.028 Manganese ppb 0.4 6.4 1.8 - 17 OTHER WATER QUALITY PARAMETERS PARAMETER Unit ORL Average Range Average Range Average Range ND - 140 ND ND Bromo ppb 132 ND - 198 ND ND N	НАА9		1	NA							
Manganese ppb 0.4 6.4 1.8-17	Butylated Hydroxyanisole	ppb			0.035		ND - 0.035				
OTHER WATER QUALITY PARAMETERS Unit ORL Average Range Rang	Quinoline				0.028		ND - 0.028				
PARAMETER Unit ORL Average Range Average Average Average Averag	Manganese	ppb	(0.4		6.4			1.8 - 17		
Boron ppb 1000 (NL) Bromide ppb NA Calcium (as Ca) ppm NA Chlorate ppb 800 (NL) Chromium (VI) ppb NA Hardness (as Calcium Carbonate) ppm NA Magnesium ppm NA 101 84 - 118 45 8.0 - 79 Magnesium ppm NA 12 10 - 14 4.0 0.2 - 6.8 Molybdenum ppb NA 2.1 1.4 - 2.1 ND ND pH - NA 7.9 7.6 - 8.1 9.3 8.6 - 9.8 Potassium ppm NA 2.9 2.4 - 3.2 0.8 0.3 - 1.3 Silica ppm NA 11.5 8 - 15 4.8 2.8 - 7 Sodium ppm NA ND ND ND ND Strontium ppb NA ND ND ND ND Total Alkalinity (as Calcium Carbonate) ppm <td>OTHER WATER QUALITY PARAMETERS</td> <td></td>	OTHER WATER QUALITY PARAMETERS										
Bromide ppb NA ND ND - 140 ND ND Calcium (as Ca) ppm NA 21 17 - 24 12 2.9 - 22 Chlorate ppb 800 (NL) 213 53 - 476 240 67 - 480 Chromium (VI) ppb NA ND ND ND ND Hardness (as Calcium Carbonate) ppm NA 101 84 - 118 45 8.0 - 79 Magnesium ppm NA 12 10 - 14 4.0 0.2 - 6.8 Molybdenum ppb NA 2.1 1.4 - 2.1 ND ND pH - NA 7.9 7.6 - 8.1 9.3 8.6 - 9.8 Potassium ppm NA 2.9 2.4 - 3.2 0.8 0.3 - 1.3 Silica ppm NA 11.5 8 - 15 4.8 2.8 - 7 Sodium ppm NA ND ND ND ND Temperature °C NA					Average	Range					
Calcium (as Ca) ppm NA 21 17 - 24 12 2.9 - 22 Chlorate ppb 800 (NL) 213 53 - 476 240 67 - 480 Chromium (VI) ppb NA ND ND ND ND Hardness (as Calcium Carbonate) ppm NA 101 84 - 118 45 8.0 - 79 Magnesium ppm NA 12 10 - 14 4.0 0.2 - 6.8 Molybdenum ppb NA 2.1 1.4 - 2.1 ND ND pH - NA 7.9 7.6 - 8.1 9.3 8.6 - 9.8 Potassium ppm NA 2.9 2.4 - 3.2 0.8 0.3 - 1.3 Silica ppm NA 11.5 8 - 15 4.8 2.8 - 7 Sodium ppm NA 11.5 8 - 15 4.8 2.4 - 22 Strontium ppb NA ND ND ND ND Total Alkalinity (as Calcium Carbonate)											
Chlorate ppb 800 (NL) Chromium (VI) ppb NA Hardness (as Calcium Carbonate) ppm NA Magnesium ppm NA Molybdenum ppb NA pH - NA Potassium ppm NA Silica ppm NA Sodium ppm NA Strontium ppb NA Temperature °C NA Total Alkalinity (as Calcium Carbonate) ppm NA											
Chromium (VI) ppb NA ND ND ND ND Hardness (as Calcium Carbonate) ppm NA 101 84 - 118 45 8.0 - 79 Magnesium ppm NA 12 10 - 14 4.0 0.2 - 6.8 Molybdenum ppb NA 2.1 1.4 - 2.1 ND ND pH - NA 7.9 7.6 - 8.1 9.3 8.6 - 9.8 Potassium ppm NA 2.9 2.4 - 3.2 0.8 0.3 - 1.3 Silica ppm NA 11.5 8 - 15 4.8 2.8 - 7 Sodium ppm NA 52.5 43-59 14 2.4 - 22 Strontium ppb NA ND ND ND ND Temperature °C NA ND ND ND ND Total Alkalinity (as Calcium Carbonate) ppm NA 76 70 - 103 55 6.7 - 138											
Hardness (as Calcium Carbonate) ppm NA 101 84 - 118 45 8.0 - 79 Magnesium ppm NA 12 10 - 14 4.0 0.2 - 6.8 Molybdenum ppb NA 2.1 1.4 - 2.1 ND ND pH − NA 7.9 7.6 - 8.1 9.3 8.6 - 9.8 Potassium ppm NA 2.9 2.4 - 3.2 0.8 0.3 - 1.3 Silica ppm NA 11.5 8 - 15 4.8 2.8 - 7 Sodium ppm NA 52.5 43-59 14 2.4 - 22 Strontium ppb NA ND ND ND ND Temperature °C NA ND ND ND ND ND Total Alkalinity (as Calcium Carbonate) ppm NA 76 70 - 103 55 6.7 - 138											
Magnesium ppm NA 12 10 - 14 4.0 0.2 - 6.8 Molybdenum ppb NA 2.1 1.4 - 2.1 ND ND pH - NA 7.9 7.6 - 8.1 9.3 8.6 - 9.8 Potassium ppm NA 2.9 2.4 - 3.2 0.8 0.3 - 1.3 Silica ppm NA 11.5 8 - 15 4.8 2.8 - 7 Sodium ppm NA 52.5 43-59 14 2.4 - 22 Strontium ppb NA ND ND ND ND Temperature °C NA ND ND ND ND Total Alkalinity (as Calcium Carbonate) ppm NA 76 70 - 103 55 6.7 - 138											
Molybdenum ppb NA 2.1 1.4-2.1 ND ND pH - NA 7.9 7.6-8.1 9.3 8.6-9.8 Potassium ppm NA 2.9 2.4-3.2 0.8 0.3-1.3 Silica ppm NA 11.5 8-15 4.8 2.8-7 Sodium ppm NA 52.5 43-59 14 2.4-22 Strontium ppb NA ND ND 110 14-242 Temperature °C NA ND ND ND ND Total Alkalinity (as Calcium Carbonate) ppm NA 76 70-103 55 6.7-138											
pH - NA 7.9 7.6 - 8.1 9.3 8.6 - 9.8 Potassium ppm NA 2.9 2.4 - 3.2 0.8 0.3 - 1.3 Silica ppm NA 11.5 8 - 15 4.8 2.8 - 7 Sodium ppm NA 52.5 43-59 14 2.4 - 22 Strontium ppb NA ND ND 110 14 - 242 Temperature °C NA ND ND ND ND Total Alkalinity (as Calcium Carbonate) ppm NA 76 70 - 103 55 6.7 - 138											
Potassium ppm NA 2.9 2.4-3.2 0.8 0.3-1.3 Silica ppm NA 11.5 8-15 4.8 2.8-7 Sodium ppm NA 52.5 43-59 14 2.4-22 Strontium ND ND 110 14-242 Temperature °C NA ND ND ND Total Alkalinity (as Calcium Carbonate) ppm NA 76 70-103 55 6.7-138		ppn									
Silica ppm NA 11.5 8-15 4.8 2.8-7 Sodium ppm NA 52.5 43-59 14 2.4-22 Strontium ppb NA ND ND 110 14-242 Temperature °C NA ND ND ND ND Total Alkalinity (as Calcium Carbonate) ppm NA 76 70-103 55 6.7-138											
Sodium ppm NA 52.5 43-59 14 2.4 - 22 Strontium ppb NA ND ND 110 14 - 242 Temperature °C NA ND ND ND ND Total Alkalinity (as Calcium Carbonate) ppm NA 76 70 - 103 55 6.7 - 138											
Strontium ppb NA ND ND 110 14 - 242 Temperature °C NA ND											
Temperature °C NA ND ND ND ND ND Total Alkalinity (as Calcium Carbonate) ppm NA NA 76 70 - 103 55 6.7 - 138											
Total Alkalinity (as Calcium Carbonate) ppm NA NA 76 70 - 103 55 6.7 - 138											

Water Quality Information

Lead

If present, elevated levels of lead can cause serious health problems, especially for pregnant women and young children. Infants and young children are typically more vulnerable to lead in drinking water than the general population. Lead in drinking water is primarily from materials and components associated with service lines and home plumbing. The City is responsible for providing high quality drinking water, but cannot control the variety of materials used in plumbing components. It is possible that lead levels at your home may be higher than at other homes in the community as a result of materials used in your home's plumbing. If you are concerned about elevated lead levels in your home's water, you may wish to have your water tested by a laboratory and/or flush your tap. When your water has been sitting for several hours, you can minimize the potential for lead exposure by flushing your tap for 30 seconds to 2 minutes before using water for drinking or cooking. If you do so, you may wish to collect the flushed water and reuse it for another beneficial purpose, such as watering plants. Information on lead in drinking water, testing methods, and steps you can take to minimize exposure is available from the USEPA Safe Drinking Water Hotline or at 1 (800) 426-4791 or at epa.gov/lead.

In 2018, the City of Milpitas, through a coordinated effort with the Milpitas Unified School District (MUSD) has completed lead sampling at fourteen (14) K-12 school sites, in compliance

Fluoride and Dental Fluorosis

Mandated by State law, water fluoridation is a widely accepted practice proven to be safe and effective for preventing and controlling tooth decay. The fluoride target level in the water is 0.7 milligram per liter (mg/L, or part per million, ppm), consistent with the May 2015 State regulatory guidance on optimal fluoride level. Infants fed formula mixed with water containing fluoride at this level may still have a chance of developing tiny white lines or streaks in their teeth. These marks are referred to as mild to very mild fluorosis, and are often only visible under a microscope. Even in cases where the marks are visible, they do not pose any health risk. The Centers of Disease Control (CDC) considers it safe to use optimally fluoridated water for preparing infant formula. To lessen this chance of dental fluorosis, you may choose to use low-fluoride bottled water to prepare infant formula. Nevertheless, children may still develop dental fluorosis due to fluoride intake from other sources such as food, toothpaste and dental

Contact your healthcare provider or SWRCB-DDW if you have concerns about dental fluorosis. For additional information about fluoridation or oral health, visit the SWRCB-DDW website www.waterboards.ca.gov/drinking_water/certlic/drinkingwater/Fluoridation.shtml, or the CDC website www.cdc.gov/fluoridation.

Disinfection with Chloramine

The water from both SFPUC and Valley Water is treated with chloramine to protect public health. Chloramine assists in destroying disease-causing organisms. Chloramine is considered safe for use as a water disinfectant. However, home dialysis patients and aquarium owners must take precautions before using the chloraminated water in kidney dialysis machines or aquariums. Dialysis patients should consult with their doctor or dialysis technician and aquarium owners should consult with their pet store.

Water hardness is determined mainly by the presence of calcium and magnesium salts. Although hard water does not pose a health risk, it may be considered undesirable for other reasons. Some benefits of water softening are reductions in soap usage, longer life for water heaters and a decrease in encrustation of pipes; disadvantages are an increase in sodium intake, an increase in maintenance and servicing and potential adverse effects on saltsensitive plants. To convert hardness from ppm to grains per gallon, divide by 17.1. A hardness scale is provided below for your reference.

Hardness Classification		ppm
Soft	less than 1.0	less than 17.1
Slightly hard	1.0-3.5	17.1–60
Moderately hard	3.5–7.0	60–120
Hard	7.0–10.5	120–180
Very hard	over 10.5	over 180

* Typical Sources In Drinking Water

01		
Naturally present in the environment	12	Leaching from natural deposits
Soil runoff	13	Naturally-occurring organic material
Erosion of natural deposits	14	Seawater influence

15 Industrial wastes

16 Substances that form ions when in water

19 Discharges from industrial manufacturers

20 Drinking water disinfectant added for treatment

18 Leaching from wood preservatives

Internal corrosion of household plumbing systems

Residue from some surface water treatment

- Water additive that promotes strong teeth Discharge from fertilizer and aluminum factories Runoff and leaching from fertilizer use Leaching from septic tanks and sewage
- By-product of drinking water disinfection Various natural and man-made sources
- 11 Runoff from natural deposits

riations				
Degrees Celsius	% pos	% positive		
Color unit	RAA	Running annual average		
Cysts per liter	VW	Valley Water		
Division of Drinking Water	SFPUC	San Francisco Public Utilities		
Not applicable		Commission		
Not detected	TOC	Total organic carbon		
No standard	TON	Threshold odor number		
Nephelometric turbidity unit	USEPA	United States Environmental Protection		
Notification Level		Agency		
parts per trillion (nanograms per liter)	μS/cm	microSiemens per centimeter		
parts per billion (micrograms per liter)	ppm	parts per million (milligrams per liter)		
	Degrees Celsius Color unit Cysts per liter Division of Drinking Water Not applicable Not detected No standard Nephelometric turbidity unit Notification Level parts per trillion (nanograms per liter)	Degrees Celsius % pos Color unit RAA Cysts per liter VW Division of Drinking Water SFPUC Not applicable Not detected TOC No standard TON Nephelometric turbidity unit USEPA Notification Level parts per trillion (nanograms per liter)		

су

DE

- a. For unfiltered water, the MCL is 5.0 NTU. For filtered water, the MCL is ≤0.3 NTU 95% of the time.
- b. Water system was fed by Santa Teresa and Penitencia Water Treatment Plants.
- c. Maximum value measured.
- d. Percent of time turbidity was maintained at or below 0.3 NTU.